



Key Features

- High inrush specification relays (single pole, normally open)
- Wired override input to allow for external triggers
- LED segment display and push buttons
- Can operate as:
 - 8 individual channels (8 x 1)
 - or 4 sets of 2 channels (4 x 2)
 - or 2 sets of 4 channels (2 x 4)

Installation Notes

- For installation in a restricted access location only
- Isolate the mains supply before installation
- The unit's mains supply must be protected.
- External protection must not exceed 6 A
- All DALI and mains cabling must be 230 V mains rated
- Do not connect DALI or S-DIM / DMX at the same time
- Install the unit horizontally to allow for heat dissipation
- Any enclosure must provide adequate cooling ventilation
- Please refer to the LMS CD HE DALI RELAY 8CH 16A

Connections

DALI:	0.5 mm ² - 1.5 mm ² stranded or solid core (max. 300 m @ 1.5 mm ²)
Mains/relay:	Up to 4 mm ² solid core or up to 2.5 mm ² stranded
S-DIM / DMX:	0.22 mm ² - 1.5 mm ² low-loss RS485, Type multistranded, twisted and shielded
Cable rating:	All cables must be mains rated.

Power

Mains supply:	85 VAC - 264 VAC, 45 Hz - 65 Hz
Power consumption:	2.6 W
Standby power consumption:	1.1 W
Internal losses:	2.1 W + max. 1.6 W per channel
Control circuit protection:	6 A maximum. The unit's mains supply must be protected.
DALI consumption:	2 mA
Isolation:	4 kV between every connector, with these exceptions: SDIM 0V and OVR 0V are NOT isolated from each other
Compliance:	Complies with DSI standard v 2.0

Inputs


Communication:	DALI, S-DIM and DMX
Override:	Wired override input
User interface:	2 push buttons for configuration
Channels:	8 (2 channels per 4-way connector)
Relay contacts:	High inrush (200 µs at 800 A), single-pole, single-throw (SPST) relay. W pre-make contact + AgSnO ₂ . Optimised for high currents.
Relay voltage:	240 VAC / 400 VAC
Max. load per contact:	16 A resistive / incandescent; 10 A HID (cos φ = 0.6)
Number of devices:	For ballasts, quantity is limited by MCB; refer to manufacturer's data. Relay circuit external protection must not exceed 16 A. These are power relays and are not suitable for extra low-voltage operation. Where power relays are used to control contactors, please ensure snubbers are fitted.

LMS CD HE DALI RELAY 8CH 16A

CODE: 2500024KR000

Is fitted with high inrush specification relays rated at 16 A per channel, which handle short-lived high peak inrush currents during switch-on of loads. Can be networked through either DALI or S-DIM communication, to be incorporated into a or Imagine lighting control system. The unit has an intuitive LED segment display and push buttons for monitoring, manual configuration and control purposes.

DIMENSIONS

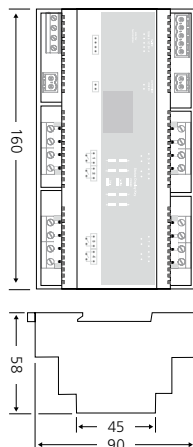

CONNECTIONS

