



User manual

version 1.0

AEDI WASH UNO 56 WHITE



1. ATTENTION

- **Consider the respective national norms during the installation!**
- Do not install the fixture near high inflammable liquids or materials.
- Do not allow anything to rest on the fixture.
- Do not install the fixture near the naked flames.
- Do not install the fixture in dirty or dusty location.
- Do not looking directly into the LED light beam at close range.
- Turn off the power prior to light fixture installation!
- The light fixture may be installed only by a qualified person !
- The light fixture must be wired according to respective electrical standards.
- The manufacturer shall not be liable for any modifications of the product of incorrect installation of the product.

2. ABOUT THE PRODUCT

The stylishly modern and unassuming exterior of AEDI WASH UNO 56 WHITE houses state-of-the-art LED technology and made using the highest quality materials and construction methods. Bringing the flexibility to outdoor application, this powerful lighting fixture is ideally suited to use in landscape, halls, storages, shelters, production areas, platforms, lighting of buildings, sport areas, airport stands and building illumination, and IP66 ensures safe operation in even the most demanding areas. With integral AC/DC power supply of 230V AC.




3. TECHNICAL SPECIFICATIONS

ITEM	AEDI WASH UNO 56 WHITE
Mounting:	Manual Tilt Adjustable Bracket
Optical systems:	Spot / Narrow / Medium / Wide / Asymmetric
Light Source:	RGB OSRAM LEDs
LED color variants:	3000 K / 4000 K / 5700 K
Lumen Output:	up to 9020lm
Input Voltage:	230V AC
Wiring:	IP rated connectors
Power Consumption:	Max. 92W
Power cable connection:	Outdoor cable
Service lifetime:	70,000 hrs. / L70 /@ 25°C
Operating ambient tem:	-20°C/+40°C
Materials:	Housing: stainless steel. Cover: clear hardened glass.
IP Rating:	IP66
Dimension:	192 x 465 x 97 mm
Weight:	16,8 kg
Accessories:	none


4. INSTALLATION – CONNECTION

The light fixture may be installed only by a qualified person and by respective national norms during the installation!

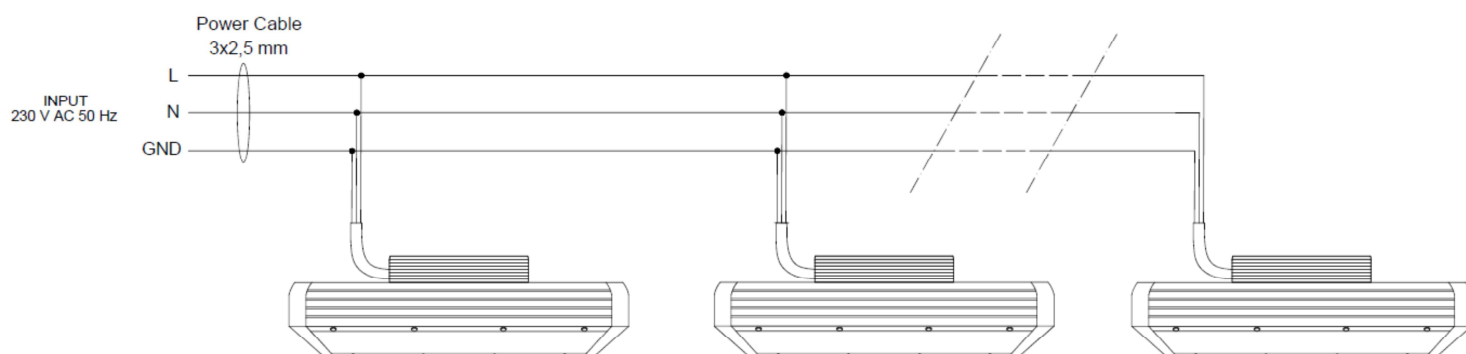



5. DIMENSIONS:

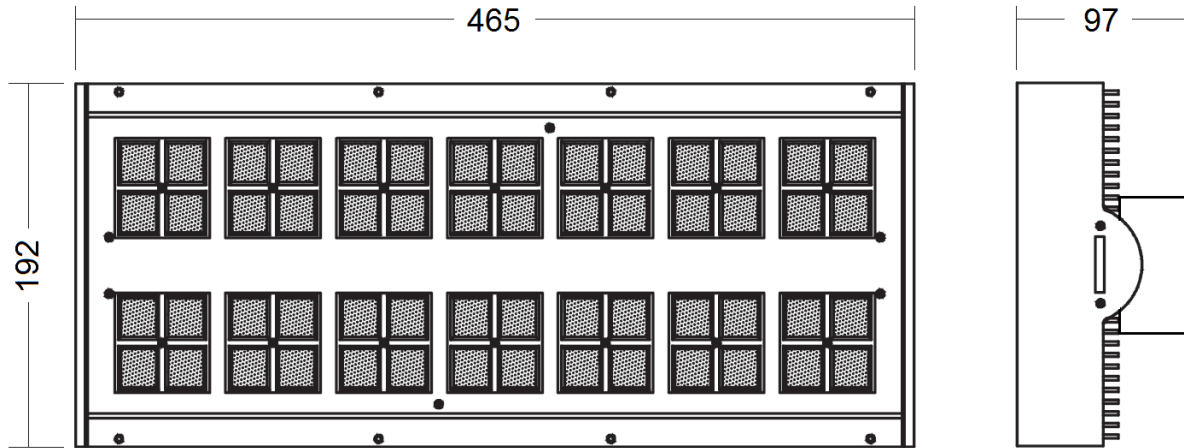

6. MAINTANANCE:

Clean the front transparent cover at least every 1-2 months. Use a moist, lint-free cloth. Never use alcohol or solvents.



WWW.SLEPROJECTS.COM

© 2014 SLE . All specifications subject to change without notice.