

# ELYS TW



## Stucchi track connector

provides safe electrical and mechanical connection and also includes a phase switching slider which allows for comfortable setting of the light system.

## Thermally protected driver

reacts to overheating first by regulating its output and if the overheating lasts, it turns off automatically, so that there is no damage caused to the driver.

## Forged heatsink design

improves its performance by 60% compared to AL die-cast and extrusion technologies; it has also a positive impact on colour stability and LED service lifetime.

## Tunable white technology

allows to adjust the lighting with regard to the displayed products; their colours can be highlighted as needed along the range from 2,700K to 5,700K based on DALI Type 6.

## Efficient optical system

is the result of a new resolution structure which has a lumen output ratio of 94%. Additional the reflector can be changed via a simple spring mechanism.

## Excellent color rendering CRI 90+


along the complete CCT range is achieved by use of 2 phosphor layers (cold and warm white) and taking advantage of both spectrum.

## Cover PC


protects the LED and optical system against unnecessary damage caused by dust or contact with the outside environment.

RETAIL


ELYS TW 24°




ELYS TW 30°



ELYS TW 50°



DIMENSIONS

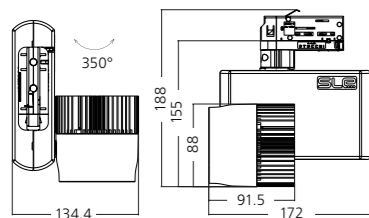

- 5 years warranty
- LED
- tunable white
- up to 2150 lm
- >90 Ra



Mounting	Suspended or ceiling / ground surfaced track system
Optical system	Facet reflector (FR) toolless exchangeable
Light distribution	Direct
Driver	Dimmable electronic control gear DALI
Materials	Luminaire head + driver box - casted AL Heatsink - forged AL Connector - Polycarbonate
Surface finish	Housing: white (RAL 9003), black (RAL 9005), grey (RAL 9006)
Accessories	Various types of connections and suspension equipment (Stucchi Trac System)
Compatibility	Compatible with Eurotrack Plus
Weight	1.3 kg
Service lifetime	50 000 hours / L80 B10 @ 35 °C
Ambient temperature	0 °C / + 35 °C
EEC	A++ / A+ / A

# ELYS TW

This fully adjustable and powerful spotlight ensures excellent colour rendition above 90 Ra over the manually adjustable CCT range. Its rich spectrum is a result of warm and cold white LED layers so if you want to add value to the shopping experience of your customers, surprise them with some quality light.

Type	mounting type	modul	net lumen output (at Ta = 25 °C)	power consumption	color rendering index	correlated color temperature	optic	control	color
ELYS TW	TR	ZENIGATA	1750 - 2150	32	>90	TW (2700 - 5700)	FR 24° / 30° / 50°	DALI	WHITE / BLACK / GREY

Luminous flux tolerance +/- 10%. The Company reserves the right to change any product specifications without prior notification.

STANDARD



order description: ELYS TW TR Z 1750 9TW FR23 DA BL