

ELYS TR FASHION

Stucchi track connector

provides safe electrical and mechanical connection and also includes a phase switching slider which allows for comfortable setting of the light system.

Thermally protected driver

reacts to overheating first by regulating its output and if the overheating lasts, it turns off automatically, so that there is no damage caused to the driver.

Outstanding color rendering

CRI 98+ is achieved by the use of Xicato LED engines. Experience an excellent color rendering from R1 - R15 including exceptional high R9 for red tones.

	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
Xicato V95 3000 K	98	99	92	97	96	98	96	95	94	90	97	95	97	98	98	98

Efficient optical system

is the result of a new resolution structure which is **94% efficient**; also, there is no need to use any tools in order to replace reflectors as they are secured with a simple spring mechanism.

Forged heatsink design


improves its performance by 60% compared to AL die-cast and extrusion technologies; it has also a positive impact on colour stability and LED operation lifetime.

Enhanced color stability


Using **Xicato 1x2 SDCM**, we can guarantee that the colours remain the same for the whole lifetime of the luminaire. The colour stability is covered also by the insurance company **Munich RE** which gives warranty that the modules will never reach more than **3SDCM**.

RETAIL


ELYS TR 23°




ELYS TR 34°



ELYS TR 53°



DIMENSIONS

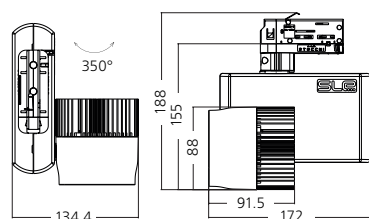

5 years warranty


LED

up to 2050 lm

up to 70 lm/W

CRI 98 Ra

1x2 SDCM

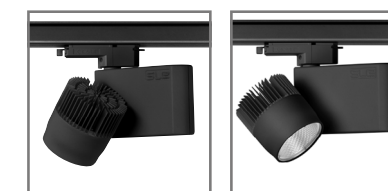

Mounting	Suspended or ceiling / ground surfaced track system
Optical system	Facet reflector (FR) toolless exchangeable
Light distribution	Direct
Driver	TRIDONIC with thermal protection - FIX - DALI (dimnable 1-100%)
Materials	Luminaire head + driver box - casted AL Heatsink - forged AL Connector - Polycarbonate
Surface finish	Housing: white (RAL 9003), black (RAL 9005), grey (RAL 9006)
Accessories	Various types of connections and suspension equipment (Stucchi Trac System)
Compatibility	Compatible with Eurotrack Plus
Weight	1.1 kg
Service lifetime	50 000 hours / L80 B10 @ 35 °C
Ambient temperature	0 °C / + 35 °C
EEC	A++ / A+ / A

ELYS TR FASHION

People choose what they buy based on colour, that is not news, especially when it comes to clothes. Your customers should see the true value of products displayed in your stores. Try this fully adjustable luminaire whose characteristic features are three different beam angles, exceptional reflector efficiency of 94%, outstanding CRI 98, and natural colouring for all colour tones, even white.

Type	mounting type	modul	net lumen output (at Ta = 25 °C)	power consumption	color rendering index	correlated color temperature	optic	control	color
			(lm)	(W)	CRI (Ra)	CCT (K)			
ELYS	TR	XICATO	1200	24	98	3000	FR 9°	FIX / DALI	WHITE / BLACK / GREY
ELYS	TR	XICATO	1550 / 1450 / 1350	22	98	3000	FR 23° / 34° / 53°	FIX / DALI	WHITE / BLACK / GREY
ELYS	TR	XICATO	2050 / 1900 / 1750	30	98	3000	FR 23° / 34° / 53°	FIX / DALI	WHITE / BLACK / GREY

Luminous flux tolerance +/- 10%. The Company reserves the right to change any product specifications without prior notification.

STANDARD



order description: ELYS TR X 2050 930 FR23 DA BL