

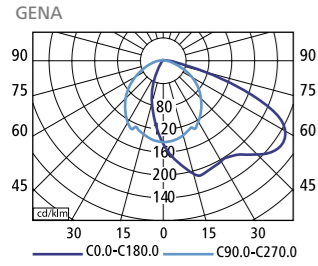


ARCHITAINMENT

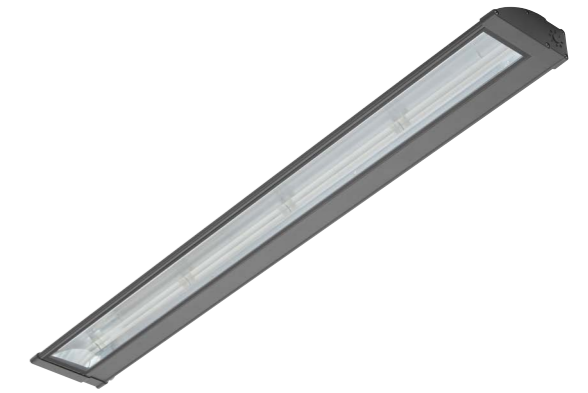

DIMENSIONS

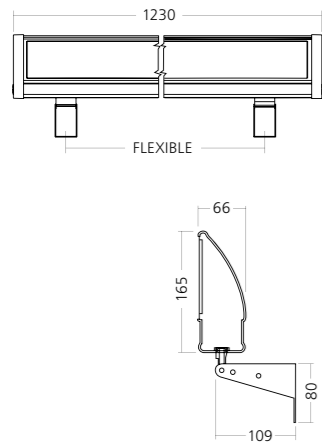

- 5 years warranty
- LED
- up to 5350 lm
- up to 135 lm/W
- 80 Ra

Mounting	Surface mounted
Optical system	Asymmetric polished reflector
Light distribution	Direct
Driver	Electronic control gear FIX/1-10V/DALI
Materials	Housing: extruded AL Reflector: polished anodised AL Reflector cover: transparent hardened glass
Surface finish	Housing: anthracite (high corrosion resistant powder coat finish RAL 7016)
Weight	5.7 kg
Service lifetime	50 000 hours / L80 B10 @ 35 °C
Ambient temperature	- 20 °C / + 45 °C
EEC	A++

GENA

Take outdoor advertising to the next level with the line of new Gena billboard lighting fixtures. With its long lifetime span and A++ energy rating Gena is a favourite product for any size of outdoor display.

Type	mounting type	modul	net lumen output (at Ta = 25 °C)	power consumption	color rendering index	correlated color temperature	optic	control	color
			(lm)	(W)	CRI (Ra)	CCT (K)			
GENA	SM	LG	2550	20	80	3000	ASYM	FIX / DALI / 1-10V	GREY
GENA	SM	LG	2600	20	80	4000	ASYM	FIX / DALI / 1-10V	GREY
GENA	SM	LG	2700	20	80	5000	ASYM	FIX / DALI / 1-10V	GREY
GENA	SM	LG	5000	40	80	3000	ASYM	FIX / DALI / 1-10V	GREY
GENA	SM	LG	5150	40	80	4000	ASYM	FIX / DALI / 1-10V	GREY
GENA	SM	LG	5350	40	80	5000	ASYM	FIX / DALI / 1-10V	GREY

Luminous flux tolerance +/- 10%. The Company reserves the right to change any product specifications without prior notification.



order description: GENA SM LG 5350 850 ASYM DA GR

STANDARD

