


FITTING ROOM

DIMENSION



MOUNTING

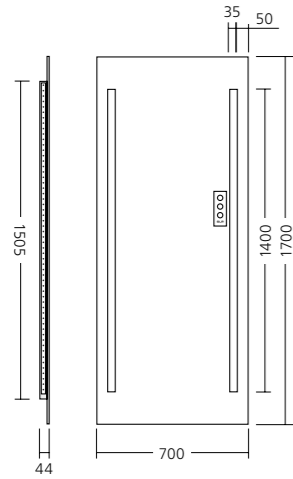

- 5 years warranty
- PI-LED™
- up to 7500 lm
- up to 73 lm/W
- 90+ Ra



Mounting	Wall mounted
Optical system	Opal diffuser
Light distribution	Direct - indirect
Driver	Electronic control gear FIX
Materials	Housing: stainless steel Diffuser: sanded glass
Surface finish	Installation plate: White
Ambient temperature	Up to +30 °C
EEC	A++ / A+ / A

PRELIMINARY

SMART MIRROR

To make sure customers look at their best when trying products, it is best to use softly diffusing, high colour rendition linear light sources mounted down the length of both sides of the mirror. Such lighting minimises the occurrence of harsh and unrealistic shadows, renders colours and skin tone naturally, flatters facial features and softens all body shapes.

Type	net lumen output (at Ta = 25 °C)	power consumption	color rendering index	correlated color temperature	optic	weight
	(lm)	(W)	CRI (Ra)	CCT (K)		kg
SMART MIRROR	7500	102	90	2700 - 4000 - 6500	180°	20

Luminous flux tolerance +/- 10%. The Company reserves the right to change any product specifications without prior notification.

STANDARD

