




OFFICE & EDUCATION



BREAN  
lm 3000 K




BREAN M



BREAN L

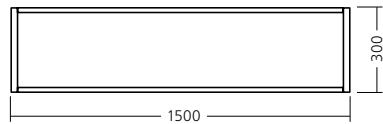

MOUNTING



5 years warranty

LED

up to 7100 lm/m

up to 119 lm/W

80 Ra

Type	mounting type	modul	net lumen output (at Ta = 25 °C)	power consumption	color rendering index	correlated color temperature	optic	control	color
			(lm)	(W)	CRI (Ra)	CCT (K)			
BREAN M	SU	SAMSUNG	3950	35	80	3000	PRISMA	FIX / DALI	WHITE
BREAN M	SU	SAMSUNG	4150	35	80	4000	PRISMA	FIX / DALI	WHITE
BREAN M	SU	SAMSUNG	4750	42	80	3000	PRISMA	FIX / DALI	WHITE
BREAN M	SU	SAMSUNG	5000	42	80	4000	PRISMA	FIX / DALI	WHITE
BREAN M	SU	SAMSUNG	6300	58	80	3000	PRISMA	FIX / DALI	WHITE
BREAN M	SU	SAMSUNG	6650	58	80	4000	PRISMA	FIX / DALI	WHITE
BREAN L	SU	SAMSUNG	3950	35	80	3000	PRISMA	FIX / DALI	WHITE
BREAN L	SU	SAMSUNG	4150	35	80	4000	PRISMA	FIX / DALI	WHITE
BREAN L	SU	SAMSUNG	4750	42	80	3000	PRISMA	FIX / DALI	WHITE
BREAN L	SU	SAMSUNG	5000	42	80	4000	PRISMA	FIX / DALI	WHITE
BREAN L	SU	SAMSUNG	6700	62	80	3000	PRISMA	FIX / DALI	WHITE
BREAN L	SU	SAMSUNG	7100	62	80	4000	PRISMA	FIX / DALI	WHITE

Luminous flux tolerance +/- 10%. The Company reserves the right to change any product specifications without prior notification.



order description: BREAN SU S 7100 840 PRIS DA WH

Mounting	Suspended
Optical system	Prismatic difuser
Light distribution	Direct-indirect
Driver	Electronic control gear - FIX - DALI (dimnable 1-100%)
Materials	Housing: AL + PMMA Diffuser:
Surface finish	White (RAL9003)
Accessories	Included: Rope suspension 038 (see accessories)
Weight	kg
Service lifetime	50 000 hours / L80 B10 @ 35 °C
Ambient temperature	up to + 35 °C
EEC	A++ / A+ / A

STANDARD



PRELIMINARY

BREAN

The light-conducting optical area of the Brean luminaire is illuminated with the edge-lighting principle which provides direct light distribution. Indirect light distribution is provided by backlighting. The elegant design of the luminaire will be a perfect fit with interior design of any office.