








OFFICE & EDUCATION


FREYN II PV1
4250 lm 4000 K



MOUNTING



PV (ceiling 600 x 600)
PR (ceiling 625 x 625)

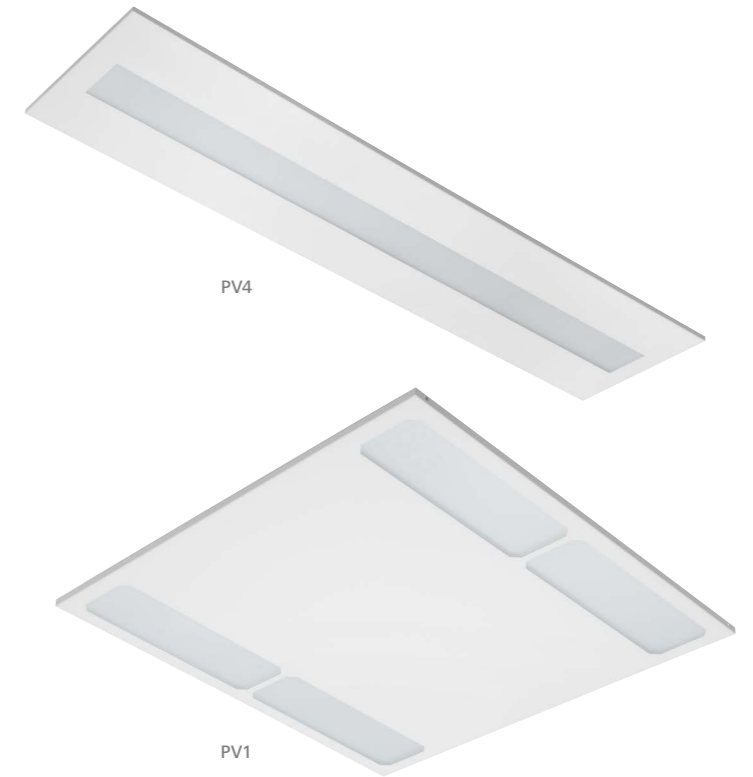



5 years warranty

LED

up to 4250 lm

up to 140 lm/W

80 Ra



Mounting	Ceiling recessed
Optical system	Diffuser
Light distribution	Direct
Driver	Electronic control gear - FIX - DALI (dimmable 10-100%) - 1-10V
Materials	Housing: sheet steel Diffuser: PMMA
Surface finish	White (RAL9003)
Accessories	On request: Frame PB1 / Trimless frame PB1
Weight	3.1 / 3.3 kg
Service lifetime	50 000 hours / L80 B20 @ 35 °C
Ambient temperature	-20 °C / +35 °C
EEC	A++ / A+ / A

FREYN II

Frey II offers one of the best lux to price ratios along with excellent efficacies. This LED luminaire is typical for its powerful yet low-glare and with full controllability, it ensures visual comfort and offers additional energy-saving potential.

Type	net lumen output (at Ta = 25 °C) (lm)	power consumption (W)	color rendering index CRI (Ra)	correlated color temperature CCT (K)	weight kg
FREYN II PV1/PR1	3000	22	80	3000	3.1
FREYN II PV1/PR1	3100	22	80	4000	3.1
FREYN II PV1/PR1	4100	31	80	3000	3.1
FREYN II PV1/PR1	4250	31	80	4000	3.1
FREYN II PV4/PR4	3000	22	80	3000	3.3
FREYN II PV4/PR4	3100	22	80	4000	3.3
FREYN II PV4/PR4	4100	31	80	3000	3.3
FREYN II PV4/PR4	4250	31	80	4000	3.3

Luminous flux tolerance +/- 10%. The Company reserves the right to change any product specifications without prior notification.

STANDARD



ON REQUEST

