



OFFICE & EDUCATION


HILA
5650 lm 3000 K




DIMENSIONS



MOUNTING



- 5 years warranty
- LED
- up to 5850 lm
- up to 90 lm/W
- 80 Ra

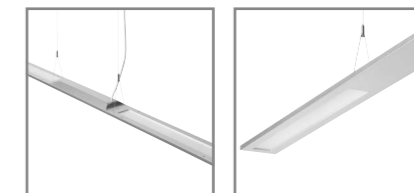

Mounting	Suspended
Optical system	Clear diffuser
Light distribution	Direct-indirect
Wiring	Electronic control gear - FIX - DALI (dimmable 1-100%)
Materials	Housing: AL Diffuser: diamond microprismatic PMMA
Surface finish	Housing: white (RAL 9003) Other colour on request
Accessories	Rope suspension 03 included (see accessories)
Weight	3.5 kg
Service lifetime	50 000 hours / L80 B10 @ 35 °C
Ambient temperature	up to + 35 °C
EEC	A++ / A+ / A

PRELIMINARY

HILA

Hila prides itself on award-winning design and clever LED technology combined with flawlessly streamline aesthetic. Once you choose to try HILA in your office, you will immediately fall in love with visual and psychological comfort brought by its softly diffused direct and indirect illumination.

Type	mounting type	modul	net lumen output (at Ta = 25 °C)	power consumption	color rendering index	correlated color temperature	optic	control	color
			(lm)	(W)	CRI (Ra)	CCT (K)			
HILA	SU	LG	5650	65	80	3000	CLR	FIX / DALI	WHITE
HILA	SU	LG	5850	65	80	4000	CLR	FIX / DALI	WHITE

Luminous flux tolerance +/- 10%. The Company reserves the right to change any product specifications without prior notification.



order description: HILA SU LG 5850 840 CLR DA WH

STANDARD

