

HAMO TW



Colour stability

is provided by **LG 3 SDCM LED's**, which is a guarantee of the same colour over the entire service lifetime.

Dali Type 8

One DALI address is assigned to one luminaire in order to control the CCT and brightness.

Excellent UGR < 19

complies with the EU norms for indoor workplace areas. It is provided by the flat light-emitting surface of the prismatic diffuser.




Tunable white technology


Based on DALI Type 8, the CCT of the luminaire can be changed to low 2,700 K to provide for relaxation and regeneration, and, on the other hand, to high 5,700 K which supports human activity and concentration.

OFFICE & EDUCATION


HAMO TW



PV1



PR1



MOUNTING (T-profile)



PV1
PR1




PV (ceiling 600 x 600)
PR (ceiling 625 x 625)


MOUNTING (Plasterboard)



Frame PB1



Trimless frame PB1



5 years warranty

tunable white

control system REQUIRED


up to 3200 lm

up to 106 lm/W

80 Ra

UGR < 19

Frames for HAMO Pi-LED PV1

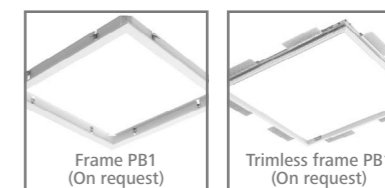

Mounting	Ceiling recessed
Optical system	Diffuser (MICROPRISMA)
Light distribution	Direct
Driver	Dimmable electronic control gear DALI
Materials	Housing: sheet steel Frame: extruded AL profile Diffuser: PMMA
Surface finish	White (RAL 9003)
Accessories	Mounting bracket On request: Frame PB1 / Trimless frame PB1
Weight	6.7 kg
Service lifetime	50 000 hours / L80 B10 at 45°C
Ambient temperature	up to + 45 °C
EEC	A++ / A+ / A

HAMO TW

This luminaire is an effective and reliable low-glare light fixture with simple design and adjustable CCT range. As a source of powerful and stable illumination, it is an ideal solution for offices and other indoor areas which require visually comfortable lighting atmosphere.

Type	mounting type	modul	net lumen output (at Ta = 25 °C)	power consumption	color rendering index	correlated color temperature	optic	control	color
			(lm)	(W)	CRI (Ra)	CCT (K)			
HAMO TW	PV1 / PR1	LG	3100 - 3200	30	80	TW (2700 - 6500)	PRISMA	DALI	WHITE

Luminous flux tolerance +/- 10%. The Company reserves the right to change any product specifications without prior notification.

STANDARD



order description: HAMO TW PV1 LG 3100 8TW PRIS DA WH