



OFFICE & EDUCATION


SNAPPY 1m
2450 lm 4000 K




DIMENSIONS





CORNER




TRIMLESS END CAP
END CAP SUS / SUR



MOUNTING

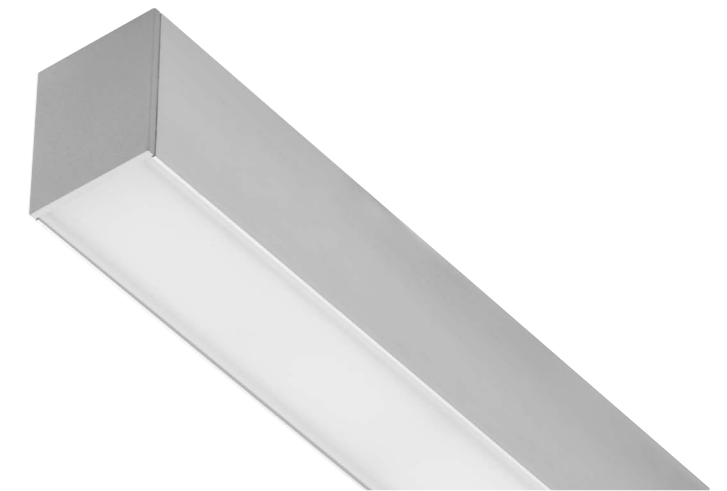

- 5 years warranty
- LED
- up to 5100 lm
- up to 90 lm/W
- 80 Ra

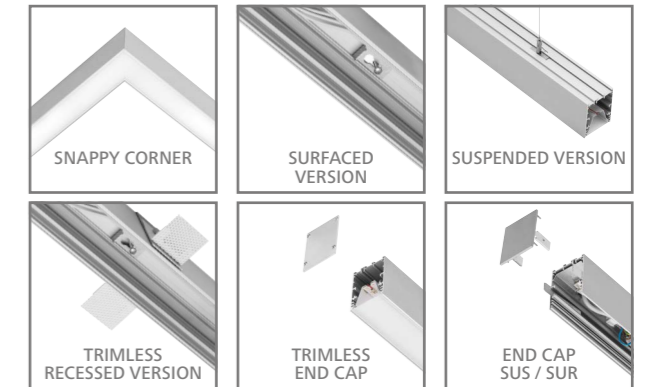

Mounting	Recessed / Surface mounted / Suspended determined for continuous installation (need accessories)
Optical system	Opal diffuser
Light distribution	Direct
Driver	Electronic control gear, Through wiring - FIX - DALI (dimmable 1-100%)
Materials	Housing: natural anodised extruded aluminum Diffuser: opal polycarbonate End caps: AL Holders and connection pieces: galvanised sheet steel Fixing accessories: galvanised sheet steel
Surface finish	Anodized aluminium (ELOX)
Accessories	On request: Recessed version: Connection pieces, Trimless end cap, Trimless mounting brackets Surfaced version: End cap, Mounting bracket Suspended version: End cap, Bracket with suspension W / WO plastic cover, Rope suspension 51/52 (see accessories)
Weight:	SNAPPY COR: 2,4 Kg SNAPPY 1.0: 2,9 Kg, SNAPPY 2.0: 5,2 Kg
Service lifetime	50 000 hours / L80 B20 @ 35 °C
Ambient temperature	- 20 °C / + 35 °C
EEC	A++ / A+ / A

SNAPPY

Snappy luminaire is extremely adaptable to indoor areas. You will find it especially useful when you need to create a complex lighting system which need to overcome barriers of all kinds; for example architectural traps like suspended ceiling or extra corners. The luminaire is available in several sizes to ensure a perfect fit with your expectations.

Type	mounting type	modul	net lumen output (at Ta = 25 °C)	power consumption	color rendering index	correlated color temperature	optic	control	color
			(lm)	(W)	CRI (Ra)	CCT (K)			
SNAPPY COR	ND	SAMSUNG	1800	21	80	3000	OPAL	FIX / DALI	ELOX
SNAPPY COR	ND	SAMSUNG	1900	21	80	4000	OPAL	FIX / DALI	ELOX
SNAPPY 1.0	ND	SAMSUNG	2350	29	80	3000	OPAL	FIX / DALI	ELOX
SNAPPY 1.0	ND	SAMSUNG	2450	29	80	4000	OPAL	FIX / DALI	ELOX
SNAPPY 2.0	ND	SAMSUNG	4900	58	80	3000	OPAL	FIX / DALI	ELOX
SNAPPY 2.0	ND	SAMSUNG	5100	58	80	4000	OPAL	FIX / DALI	ELOX

Luminous flux tolerance +/- 10%. The Company reserves the right to change any product specifications without prior notification.

order description: SNAPPY 2.0 ND 5 5100 840 OPAL DA EL

STANDARD

