

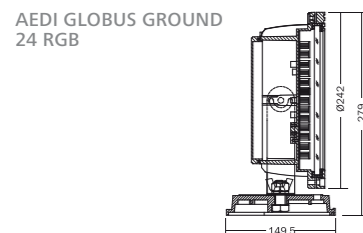
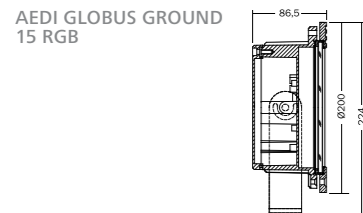


OUTDOOR FAMILY RGB / RGBW

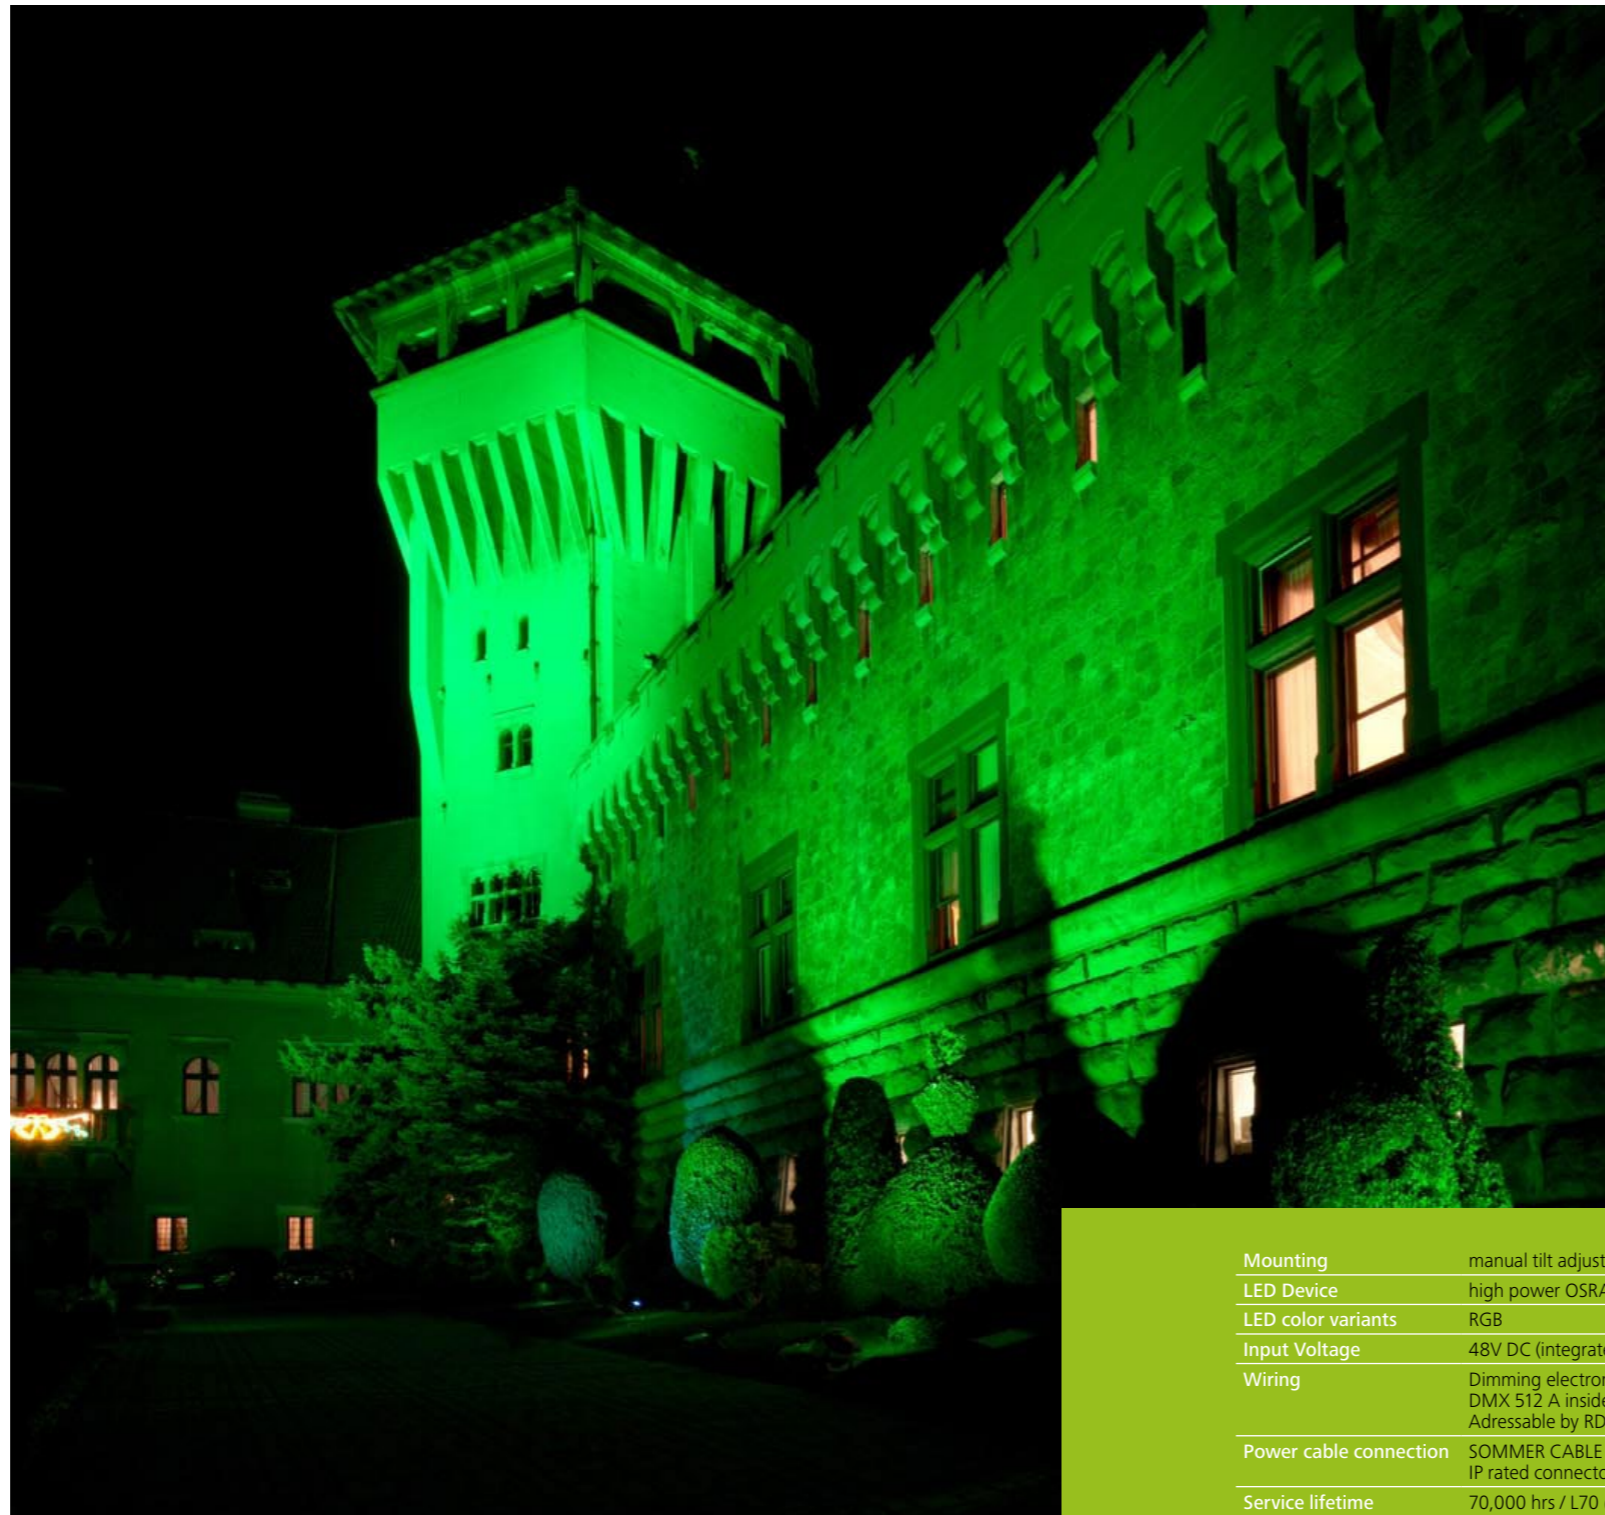

LED
up to
960
lm

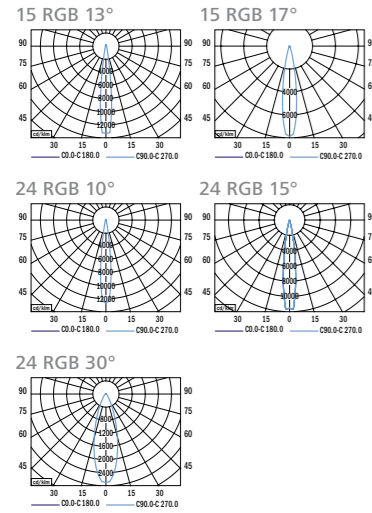

24 RGB



Mounting	manual tilt adjustable bracket
LED Device	high power OSRAM LEDs
LED color variants	RGB
Input Voltage	48V DC (integrated DMX electronics)
Wiring	Dimming electronic control gear DMX 512 A inside Addressable by RDM protocol
Power cable connection	SOMMER CABLE - SC-KOLORITH 1(L=0,5m), IP rated connectors
Service lifetime	70,000 hrs / L70 @25°C
Operating ambient tem.	-20°C / +40°C
Materials	housing: die cast aluminium cover: clear hardened glass
Dimensions	15 RGB: 86,5 x 200 x 224 mm 24 RGB: 150 x 280 x 242 mm
Accessories (not included):	constant Voltage 48V power supply DMX controllers AEDITEMPA ATTACA & AEDITEMPA LIBA

AEDI WALL GLOBUS 15/24 RGB

The stylishly modern and unassuming exterior of AEDI WALL GLOBUS houses state-of-the-art White LED technology and made using the highest quality materials and construction methods. Bringing the flexibility to outdoor application, this powerful lighting fixture is ideally suited to use in landscape and building illumination, and IP66 ensures safe operation in even the most demanding areas.

Type	net lumen output (at Ta = 25 °C)	power consumption	LED Device	beam angle	weight
	(lm)	W (mA)	(LEDs Pcs.)		(kg)
AEDI WALL GLOBUS 15 RGB	600	15.9 (350) / 23 (500)	15	Spot / Narrow / Medium / Wide / Oval	2.8
AEDI WALL GLOBUS 24 RGB	960	25.4 (350) / 37 (500)	24	Spot / Narrow / Medium / Wide / Oval	4.5

The Company reserves the right to change any product specifications without prior notification.

