

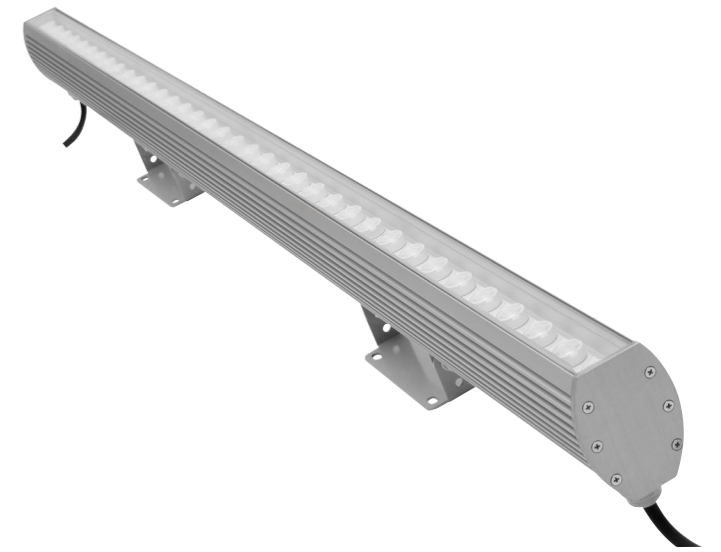
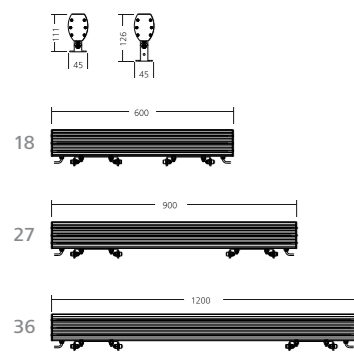


OUTDOOR FAMILY RGB / RGBW

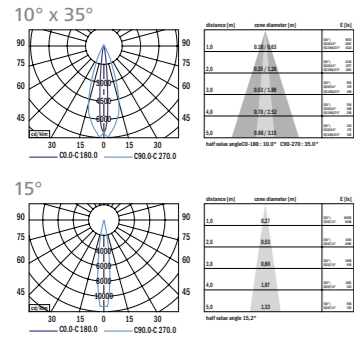

LED  
up to  
1468  
lm



Mounting	Mounting bracket adjustable (two options of bracket lengths)
LED Device	high power OSRAM LEDs
LED color variants	RGB
Input Voltage	48V DC (integrated DMX electronics)
Wiring	Dimming electronic control gear DMX 512 A inside Addressable by RDM protocol
Power cable connection	IP rated connectors
Service lifetime	70,000 hrs / L70 @25°C
Operating ambient tem.	-20°C / +40°C
Materials	housing: die cast aluminium cover: clear hardened glass
Dimensions	18 RGB: 101 / 126 x 54 x 600 mm 27 RGB: 101 / 126 x 54 x 900 mm 36 RGB: 101 / 126 x 54 x 1200 mm
Accessories (not included):	DMX controllers AEDITEMPA ATTACA & AEDITEMPA LIBA Constant Voltage power supply 230/48V

## AEDI LINE PARVUS 18/27/36 RGB

The stylishly modern and unassuming exterior of AEDI LINE PARVUS houses state-of-the-art RGB LED technology and made using the highest quality materials and construction methods. Bringing the flexibility to outdoor application, this powerful lighting fixture is ideally suited to use in landscape and building illumination, and IP66 ensures safe operation in even the most demanding areas.

Type	net lumen output (at Ta = 25 °C)	power consumption	LED Device	beam angle	weight
	(lm)	W (mA)	(LEDs Pcs.)		(kg)
<b>AEDI LINE PARVUS 18 RGB</b>	720	19.4 (350) / 27.8 (500)	18	Spot / Narrow / Medium / Wide / Oval	1.98
<b>AEDI LINE PARVUS 27 RGB</b>	1080	18.5 (350) / 41.6 (500)	27	Spot / Narrow / Medium / Wide / Oval	2.96
<b>AEDI LINE PARVUS 36 RGB</b>	1468	38.0 (350) / 55.5 (500)	36	Spot / Narrow / Medium / Wide / Oval	3.95

The Company reserves the right to change any product specifications without prior notification.

