




OUTDOOR FAMILY RGB / RGBW

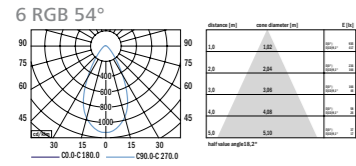

AEDI GLOBUS GROUND
3 RGB

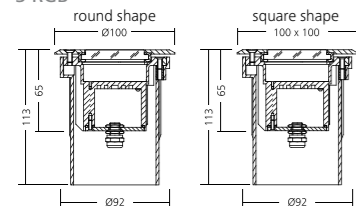

AEDI GLOBUS GROUND
6 RGB

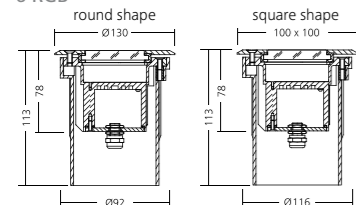

LED
up to
240
lm



Mounting	Ground recessed
LED Device	high power OSRAM LEDs
LED color variants	RGB
Input Voltage	external LED dimmer max.48V DC,see accessories
Wiring	none
Power cable connection	IP rated connectors, 8 Wire Outdoor Cable (L=0,5m)
Service lifetime	70,000 hrs / L70 @25°C
Operating ambient tem.	-20°C / +40°C
Materials	housing: die cast aluminium cover: clear hardened glass
Dimensions	3 RGB: 100 x 100 x 113 mm 6 RGB: 130 x 130 x 113 mm
Accessories (not included):	constant Voltage 48V power supply DMX controllers AEDITEMPA ATTACA & AEDITEMPA LIBA LED dimmers 4ch,6ch,12ch

AEDI GLOBUS GROUND 3/6 RGB

The stylishly modern and unassuming exterior of AEDI GLOBUS GROUND houses state-of-the-art RGB LED technology and made using the highest quality materials and construction methods. Bringing the flexibility to outdoor application, this powerful lighting fixture is ideally suited to use in landscape and building illumination, and IP67 ensures safe operation in even the most demanding areas.

Type	net lumen output (at Ta = 25 °C)	power consumption	LED Device	beam angle	weight
	(lm)	W (mA)	(LEDs Pcs.)		(kg)
AEDI GLOBUS GROUND 3 RGB	120	3.2 (350) / 4.6 (500)	3	Medium / Wide / Asymmetric	0.6
AEDI GLOBUS GROUND 6 RGB	240	6.4 (350) / 9.5 (500)	6	Medium / Wide / Asymmetric	0.8

